




# AMERICAN Timken BEARING MFG.CORP.

## INA RASE17 bearing units

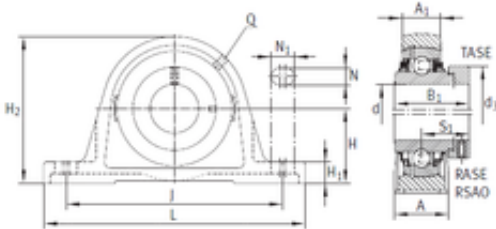

RASE17 Bearing 2D drawings and 3D CAD models

Bearing No. RASE17

Bore Diameter	17 mm
d	17 mm
S1	23,4 mm
Thread (Q)	M6
d3	28 mm
A	30 mm
A1	18 mm
B1	37,4 mm
H	30,2 mm
H1	10 mm
H2	57 mm
J	95 mm
L	125 mm
N	11 mm
N1	19 mm
Weight	0,5 Kg
Basic dynamic load rating (C)	9,8 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.599
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



## AMERICAN Timken BEARING MFG.CORP.

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE17KRRB
Seals	Double Land Riding Rubber Contact
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row   Standard Shaft Height   With Set Screw
Long Description	2 Bolt Pillow Block; 17MM Bore; 30.2MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; Relubricatable; Cast Iron; Double Land Riding Rubber Contact; Non-expansion
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	<a href="http://www.ina.com">http://www.ina.com</a>
Manufacturer Item Number	RASE17
Weight / LBS	1.102
Nominal Bolt Center to Center	3.8 Inch   97 Millimeter
Actual Bolt Center to Center	3.7 Inch   95 Millimeter
Bore	0.669 Inch   17 Millimeter
Base to Center Height	1.189 Inch   30.2 Millimeter
Length Thru Bore	1.472 Inch   37.4 Millimeter
Bolt Spacing Maximum	0 Inch   0 Millimeter



# AMERICAN Timken BEARING MFG.CORP.

Bolt Spacing Minimum

0 Inch | 0Millimeter